









With Residential A/C



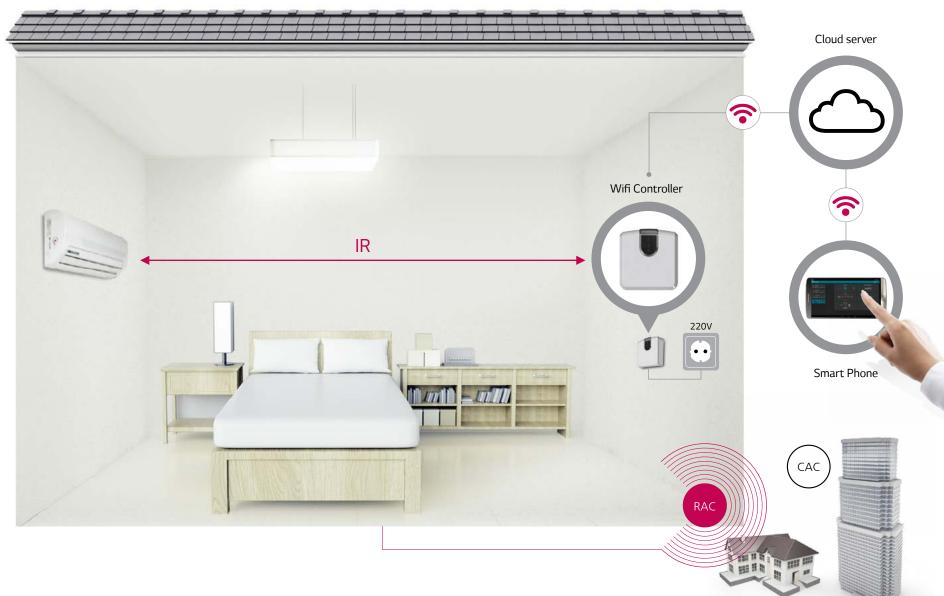


With Commercial A/C Case 1) Connection with Indoor units with IR receiver



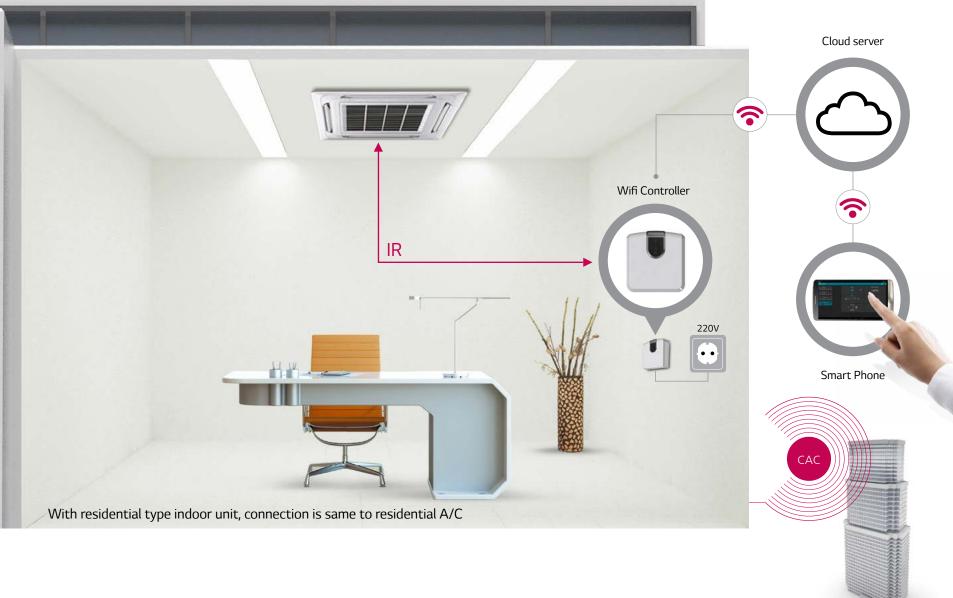


With Commercial A/C Case 2) Connection with duct type Indoor units




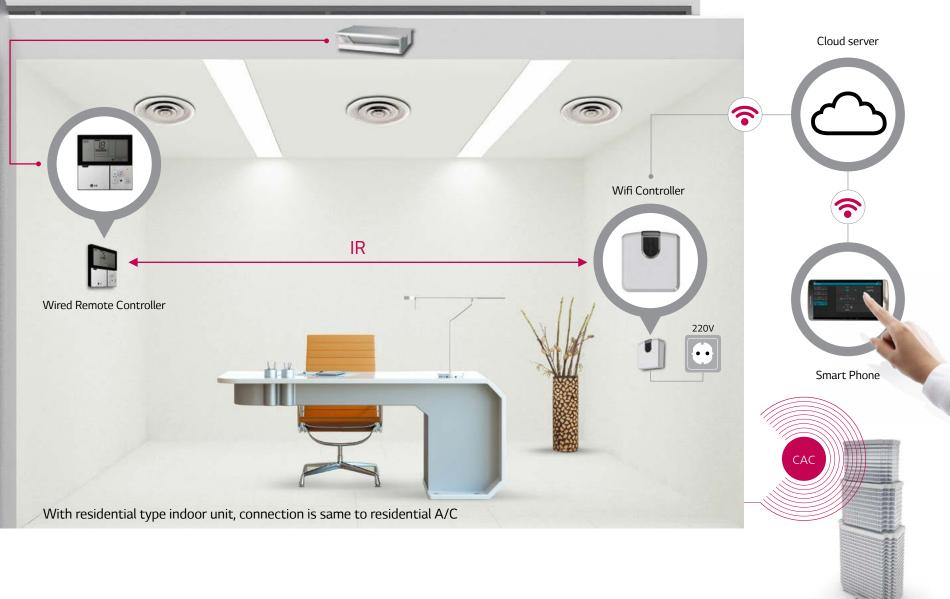

Dimension



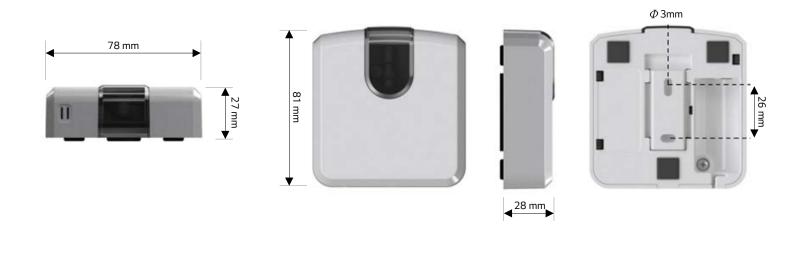

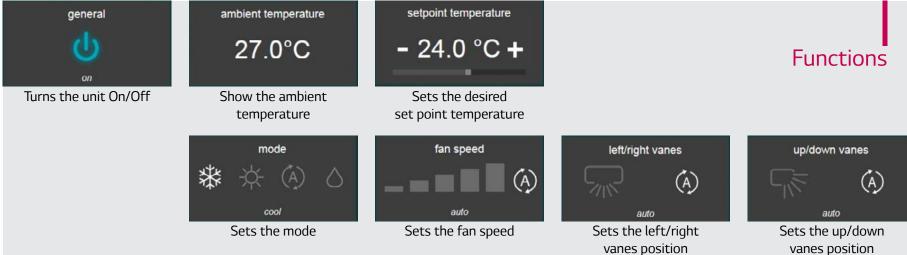



Specification

Enclosure	ABS (V-O, 5VB). 2,1 mm thickness PC (V-2). 1mm thickness
Dimensions	81 × 78 × 28 mm
Weight	76 g
Colour	White
Power supply	5VDC 0,2 A NEC Class 2 or Limited Power Source (LPS) and SELV rated Power supply
Mounting	Wall
LED indicators	1 × Device status
Operating Temperature	From 0°C to 40°C
Operating humidity	<93% HR, no condensation
Stock humidity	<93% HR, no condensation
RoHS confor- mity	Compliant with RoHS directive (2002/95/CE).
Certifications	CE conformity to EMC directive (2004/108/EC) and Low-voltage directive (2006/95/EC) • EN 60950-1 • EN 301489-1 v1.8.1 • EN 301489-17 v2.1.1 • EN 300328

